

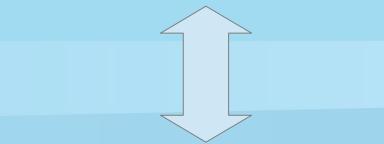


Cluana

The Hardware



IP Phone

IP Phones

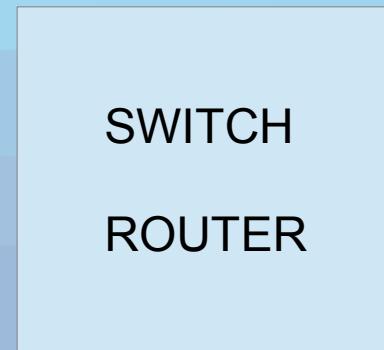

IP Phone

IP Phones

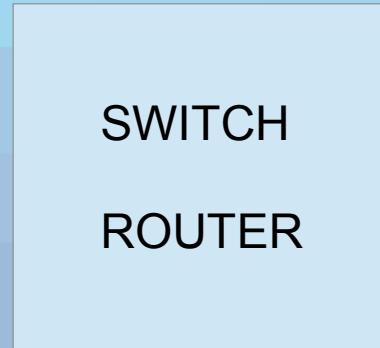

1

VOISpeed PBX

Monitoring Reports Configuration Tools

John Red 00 Change

Andy White 01 Change

Mae Black 02 Change

Create the configuration files for the users selected ► Create only one configuration file for a multi-line device ►

Analog BT Analog 01727322434 Change

ISDN Taikah ISDN 017278883311 Change

Create the configuration files for the gateways selected ►

Cluana

IP Phone

IP Phones



1

Cluana

VoiSPEED PBX

Monitoring Reports Configuration Tools

John Red 00 Change Password

Andy White 01 Change Password

Mae Black 02 Change Password

Create the configuration files for the users selected >

Create only one configuration file for a multi-line device >

Line adapters info

Name	Type	Username	Password
Analoge BT	Analoge	0172732434	<input type="checkbox"/>
ISDN Taalk	ISDN	01727888331	<input type="checkbox"/>

Create the configuration files for the gateways selected >

2

Polycom | SoundPoint IP 331

Home Simple Setup Preferences Settings Diagnostics Utilities

You are here: Utilities > Import & Export Configuration

Import & Export Configuration

Import Configuration Import Configuration File Choose File Import


Note: Configurations imported will be treated as web configurations.

Export Configuration

Views Import & Export Configuration




Phone Radius & Restore Software Upgrade Soft Key Configuration Line Key Configuration Restart Phone Reboot Phone

Analogue Gateway

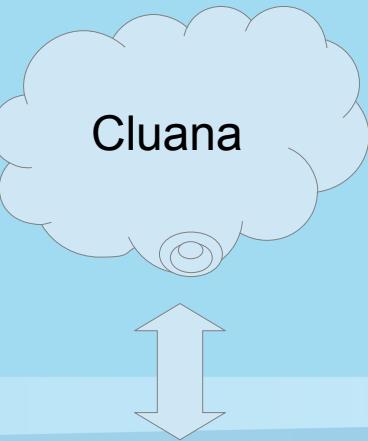

Analogue: 2 and 4 lines

Analogue Gateway

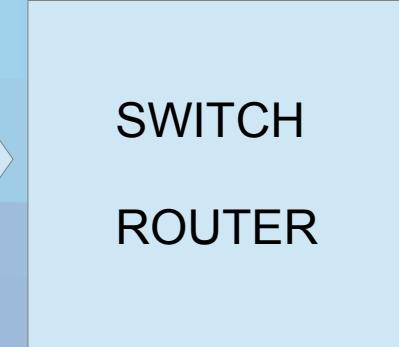




Analogue: 2 and 4 lines

1

The screenshot shows the VOISPEED PBX software interface. At the top, there are tabs for Monitoring, Reports, Settings, and Tools. Below that is a section titled 'Configuration info' with fields for 'Name' (mimosa@cluana), 'E-mail address' (mimosa@cluana.com), and 'Fax port' (505). Under 'User devices info', there is a table with columns for Name, Surname, Extension / Username, and Password. A row is shown for 'Andy' with 'Coster' as the extension. There are checkboxes for 'Change' and 'Delete'. Below this is a button 'Create the configuration files for the users selected'. At the bottom, there is a section titled 'Line adapters info' with a table for 'Analogue ET'. The table includes columns for Name, Type, Username, and Password. A row is shown for 'Analogue ET' with 'Analogue' as the type, 'mimosa' as the username, and a checked 'Change' checkbox. A red arrow points to the 'Change' checkbox in this row.

Analogue Gateway

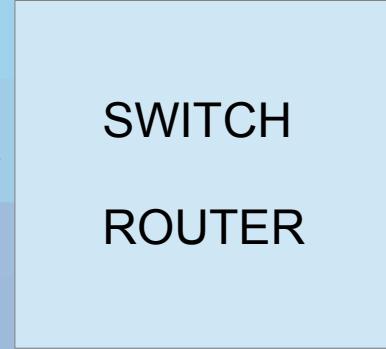

Analogue: 2 and 4 lines

1

voispeedTM PBX

Monitoring Reports Settings Andy Center: voispeed test 1.4

Configuration info

User devices info

Line adapters info

Create the configuration files for the users selected ▶

Create the configuration files for the gateways selected ▶

2

PATTON

192.168.1.70

CONFIGURATION MENU

Model: SN4112U/OEJU
Serial Number: 00A08A008791
Hardware Version: 4.4
Software Version: R6.5 2014-05-05 H323 SIP FXS FXO

System Time: Tue, 24 Jun 2014 12:27:14 GMT
Local Time: Tue, 24 Jun 2014 12:27:14 +00:00
Up Time: The system is up for 5 days, 22 hours, 38 minutes, 5 seconds

IMMEDIATE ACTIONS

Record Current Configuration
Hard Reset
Set Factory Default Configuration

PATTON
Let's Connect!

SmartNode

Model: SN4112U/OEJU
Serial Number: 00A08A008791
Hardware Version: 4.4
Software Version: R6.5 2014-05-05 H323 SIP FXS FXO

System Time: Tue, 24 Jun 2014 12:27:14 GMT
Local Time: Tue, 24 Jun 2014 12:27:14 +00:00
Up Time: The system is up for 5 days, 22 hours, 38 minutes, 5 seconds

IMMEDIATE ACTIONS

Record Current Configuration
Hard Reset
Set Factory Default Configuration




Patton Electronics Company



ISDN Gateway



ISDN Gateway

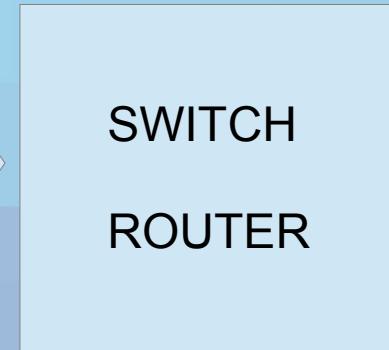

Cluana



ISDN: 2, 4, 8, 30 voice channels

1

VOISPEED PBX

Monitoring Reports Settings Andy Center VOISPEED test 14

Configuration info

Name	RJ45 interface	FAX port
voispeedcluana	minitels.cluana.com	5058

User devices info

Name	Surname	Extension / Username	Powered
Andy	Coster	40	<input type="checkbox"/> Change <input type="checkbox"/>

Create the configuration files for the users selected ►

Line adapters info

Type	Username	Password
Analogic ET	Analogue	<input type="checkbox"/> Change <input checked="" type="checkbox"/>


Create the configuration files for the gateways selected ►

ISDN Gateway




ISDN: 2, 4, 8, 30 voice channels

1

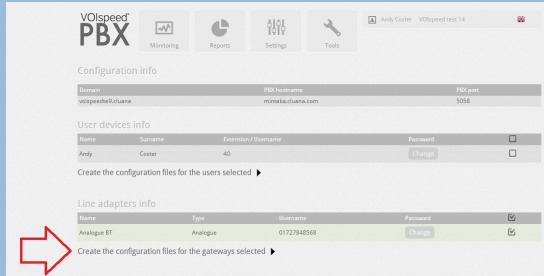

2

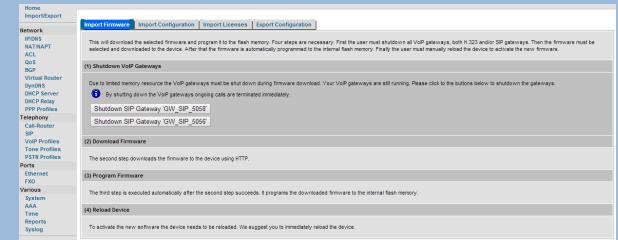

Cluana

www.cluana.com

